

Unicover W

System data sheet



Providing Practical Solutions



System features


- Ideal for airless spray application
- Excellent covering power
- Durable, long lasting system
- Multi surface application
- Tintable to any RAL/BS/NCS shade
- Self-priming system

NB: Significant colour changes will require at least 2 coats to achieve adequate coverage.

What does the system include?

1st and 2nd coat

Unicover W

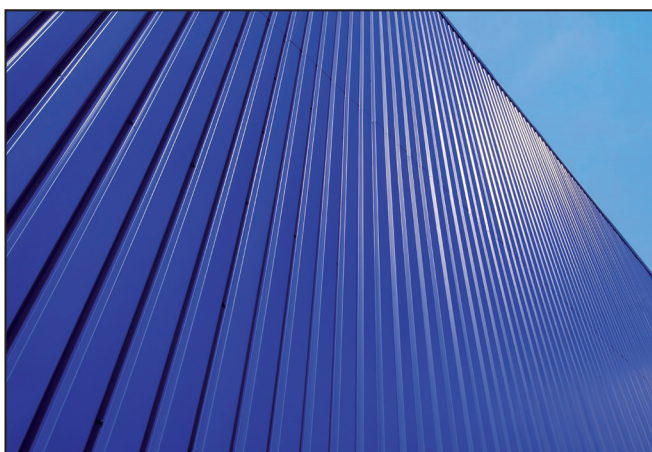

Product Overview

High-performance, tintable, water-based coating offering supreme protection for various internal and external substrates.

What does it do?

Unicover W has been developed for the fast and cost effective refurbishment of external vertical wall cladding and large internal projects.

It allows re-colouring for corporate re-branding or change of ownership or simply extends the life cycle of the cladding. The product is made on the Tor 'in can' tinting scheme, which offers any RAL/BS/NCS shade as an option. A water-based and extremely surface tolerant coating, Unicover is ideal for application in the warmer seasons, and can be spray or roller applied.

Where can it be used?

Primarily designed for the refurbishment and redecoration of vertical cladding materials such as plastisol. However also suitable for UPVC, weathered bitumen, metals, galvanised surfaces, ceiling tiles, wood, concrete, masonry, brick and plasterboard.

As building refurbishment is dependant wholly on condition, we recommend asking for a free site survey to assess your building. This service provides you with a full site specification for your project.

Can be used on: Retail Stores, Warehouses, Manufacturing units, Distribution Units, any Commercial / Retail / Industrial buildings which utilise architectural cladding.

The Tor service available to you

- Unrivalled expertise and knowledge
- Nationwide team of area managers / technical personnel
- Free site survey and risk assessment
- Free specification service (NBS format also available)
- On-site technical back-up on live projects
- CPD seminars - ask for details

How to specify

The following specifications are included for demonstrative purposes only. Always consult a representative of Tor Coatings prior to specifying or applying.

Where necessary, priming should be carried out using suitable compatible materials (it is advisable to determine necessity for priming with preliminary adhesion tests), for example:

Corroded/Delaminated Previous Coatings - substrate should have any failed coatings or surface rust removed to create a smooth base. Prime with Elastaseal Z metal primer (RC145)

2 coats of Uncover W at 10m²/litre per coat.

Virtually Undamaged Coating Metal Surfaces

2 coats of Uncover W at 10m²/litre per coat.

Tor Coatings offer a free site survey service and all of our Area Business Managers are fully trained and able to carry out full site assessments. A detailed and bespoke specification will then be issued.

Please contact Tor Coatings on 0191 410 6611 to arrange your free site survey.

Technical information

| | Uncover W |
|------------------------------|----------------------------|
| Theoretical coverage | 10m ² per litre |
| Application | Brush / airless spray |
| Pack size | 5 Litres |
| Touch dry | 1 hour |
| Hard dry | 3 hours |
| Minimum overcoating time | 1 hour |
| Maximum overcoating interval | 7 days |

Note: Coverage rate may vary depending on substrate condition, environment etc.

A copy of the appropriate Technical Data Sheets and Health and Safety Data Sheets should be consulted prior to using the products.

Technical support



Tor Coatings' national team of Area Business Managers is supported by a dedicated customer service team, a large team of paint chemists and a dedicated technical help desk.

Call 0191 411 3148 for assistance from our helpdesk, or visit www.tor-coatings.com to find out more.



Providing Practical Solutions

Tor Coatings Limited, Portobello Industrial Estate,
Birtley, County Durham, DH3 2RE.

Tel: +44 (0)191 410 6611 **Fax:** +44 (0)191 492 0125

E-mail: enquiries@tor-coatings.com

Web: www.tor-coatings.com