



# JOTUN

Jotun Protects Property



**THE INDUSTRY JUST  
GOT QUICKER**





# THE INDUSTRY JUST GOT QUICKER. ABOUT TIME.

When your tanks are out of service, they are not making you money. At Jotun, we have dramatically reduced the application time for lining tanks. Products, such as Tankguard SF, allowing for wet-on-wet application, and Tankguard Plus, allowing for up to 50% faster completion – give you significantly shorter shutdowns, letting your tanks return to service quicker than ever before.

This means more operational time, maximizing your profitability. Ensure your tanks are earning to their full potential, fast. TankFast.

## Take care of business from the inside. Get faster with your tank linings.

### ***Tankguard***

STORAGE

PHENOLIC EPOXY

Getting your clean petroleum product and crude oil tanks back into service **within 48 hours**.

### ***Tankguard***

SF

SF NOVOLAC EPOXY

The benefit of two solvent-free coats **in the time of one**.

### ***Chemflake***

SPECIAL

GLASS FLAKE VINYL ESTER

**The fastest lining** for acid storage tanks.

### ***Tankguard***

PLUS

NOVOLAC EPOXY

Up to **50% faster** than competition, for 95% of storage tanks.

### ***Tankguard***

ZINC

ZINC SILICATE

The best solvent resistance **60% faster** than an epoxy coating – no mud-cracking.

TYPICAL CHALLENGES FOR **CHEMICAL TANKS**:

- **Avoid product contamination**
- **Aggressive product**
- **Maintain lining integrity**



RECOMMENDED LININGS:

<b>Tankguard</b>	<b>Tankguard</b>	<b>Chemflake</b>
PLUS	SF	SPECIAL
NOVOLAC EPOXY	SF NOVOLAC EPOXY	GLASS FLAKE VINYL ESTER

TYPICAL CHALLENGES FOR **SOLVENT/BLENDS TANKS**:

- **Avoid product contamination**
- **Maintain lining integrity**



RECOMMENDED LININGS:

<b>Tankguard</b>	<b>Tankguard</b>	<b>Tankguard</b>
PLUS	SF	ZINC
NOVOLAC EPOXY	SF NOVOLAC EPOXY	ZINC SILICATE

TYPICAL CHALLENGES FOR **PETROCHEMICAL TANKS**:

- **Avoid product contamination**
- **Maintain lining integrity**




RECOMMENDED LININGS:

<b>Tankguard</b>	<b>Tankguard</b>
PLUS	STORAGE
NOVOLAC EPOXY	PHENOLIC EPOXY

TYPICAL CHALLENGES FOR **CRUDE OIL TANKS**:

- **Water content**
- **SRB (sulphate reducing bacteria)**
- **Temperature management**

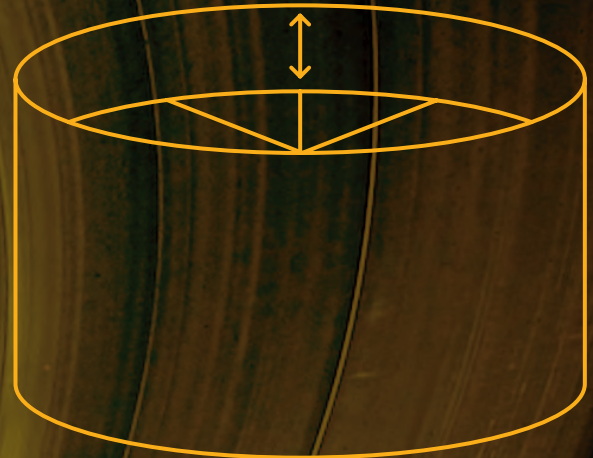

RECOMMENDED LININGS:

<b>Tankguard</b>	<b>Tankguard</b>
PLUS	STORAGE
NOVOLAC EPOXY	PHENOLIC EPOXY

**Jotun A/S**  
P.O. Box 2021  
N-3202 Sandefjord, Norway  
Tel: +47 33 45 70 00  
[jotun.com](http://jotun.com)

